











ZAZA2 PBJ

Patent deposit


ADVANTAGES

- Easy to install
- No CLAMP

No maintenance

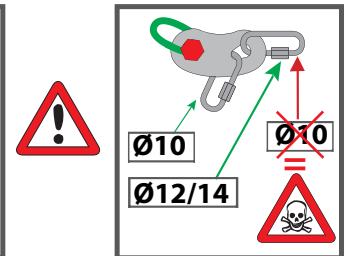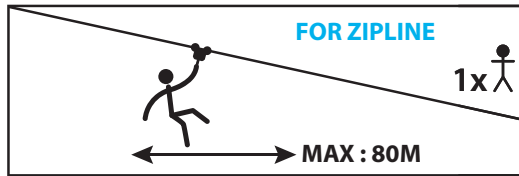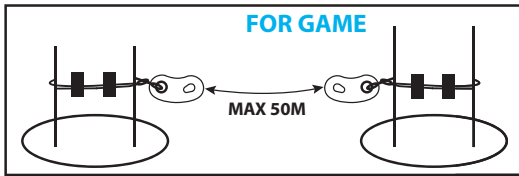


FIXATION EXAMPLE (non-exhaustive list)

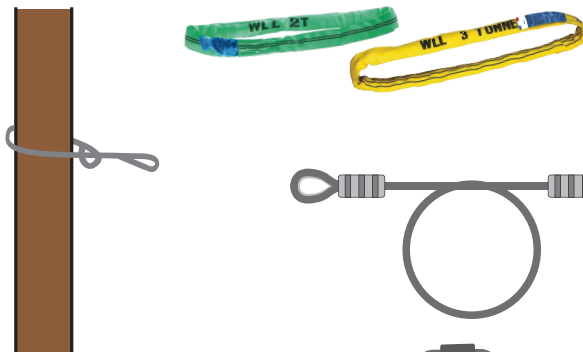

ROUND TEXTILE SLING FOR LIFTING TYPE "E" WLL mini 2 tons


STANDARDS: EN 13411-1/7

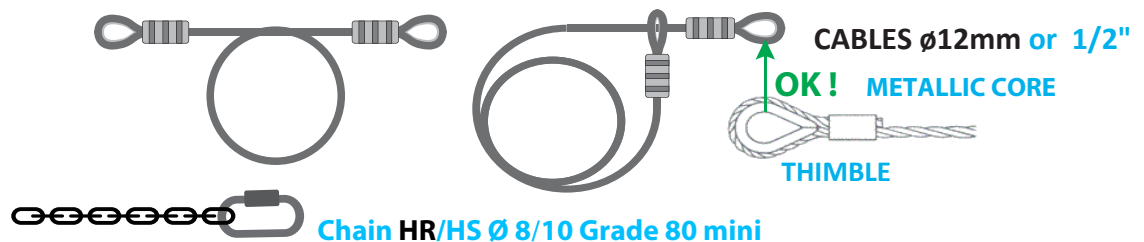


Chain HR/HS Ø 8/10 Grade 80 mini




WLL of the fixing element must be correctly sized

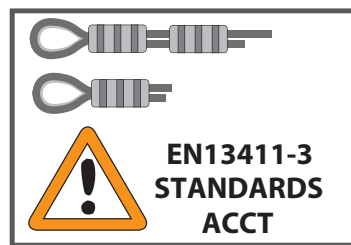

Operation 1

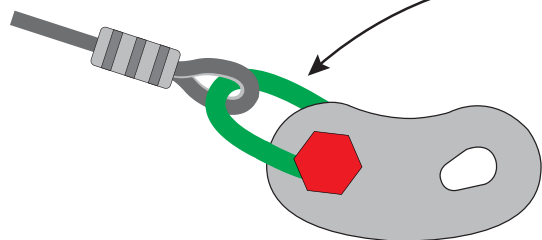

x1




= HR 2T - HS 1/2"

STANDARDS OF ASSEMBLY



EN 15567-1
EN 13411-3
STANDARDS - ACCT


Operation 2

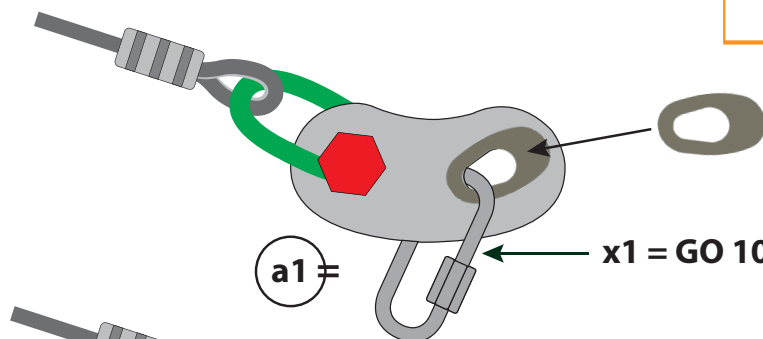

GUIDING PLATE

a1 =

x1 = GO 10 - LO 7/16"

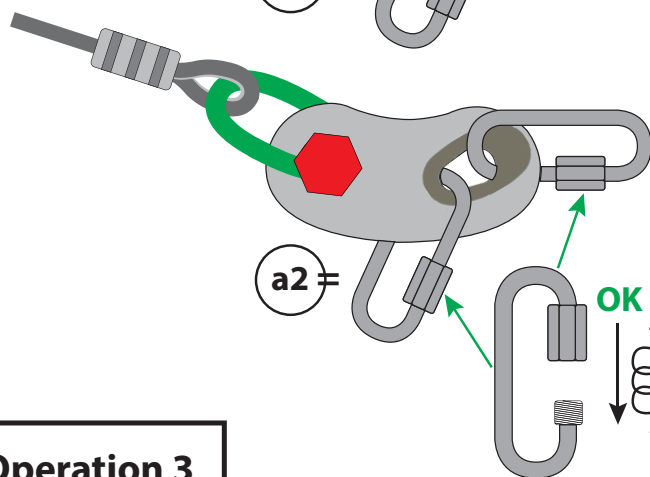

FOR GAMES x1 = GO 12 - LO 1/2"

FOR ZIPLINE

x1 = GO 14 - LO 9/16"


a2 =

OK

NO!

Operation 3

● INSTALLATION of STARTING PLATE

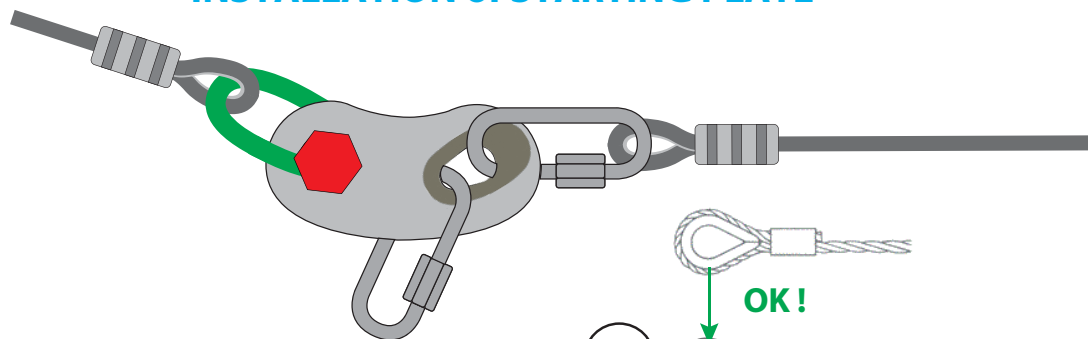

OK!


a3 =

x 130KN




Operation 4

● INSTALLATION of ARRIVALL PLATE

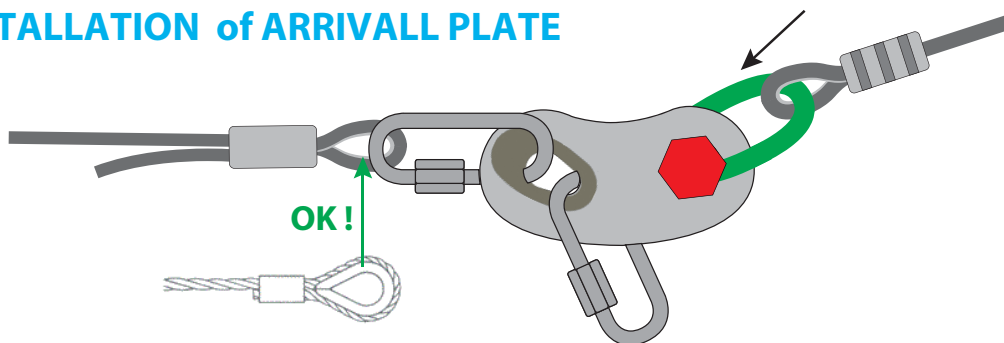


Operation 5

● CABLE TENSION

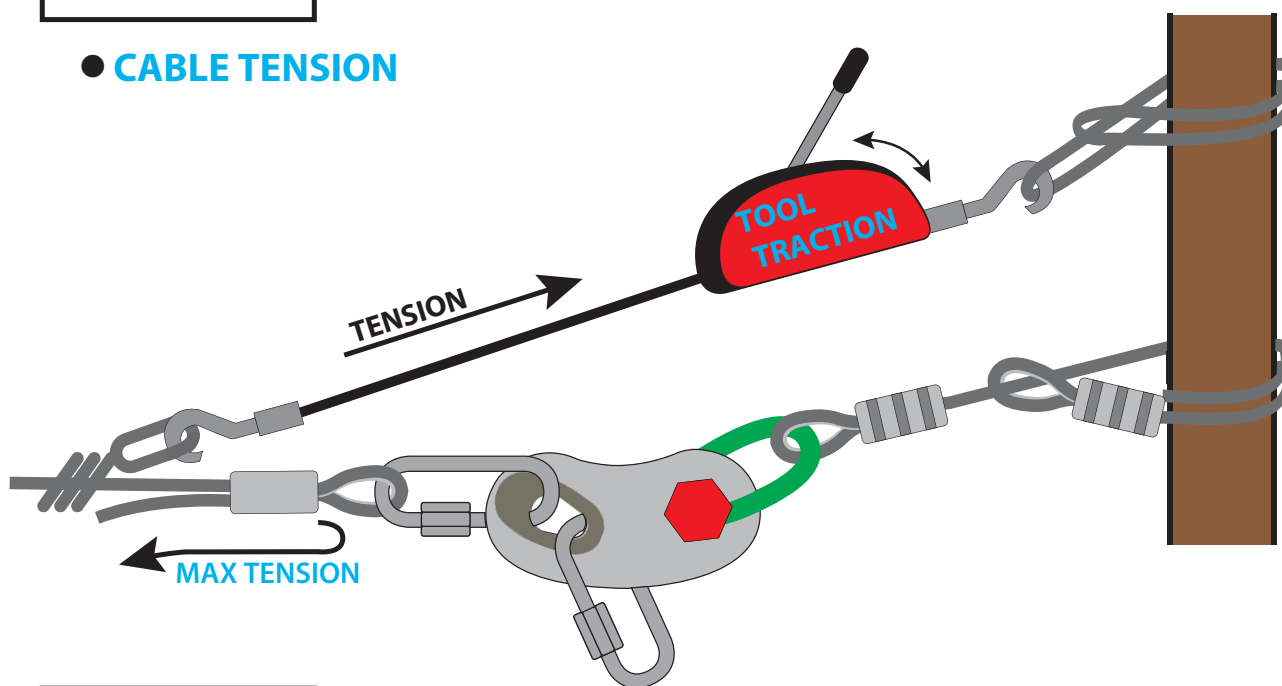

Operation 6


● TO CRIMP

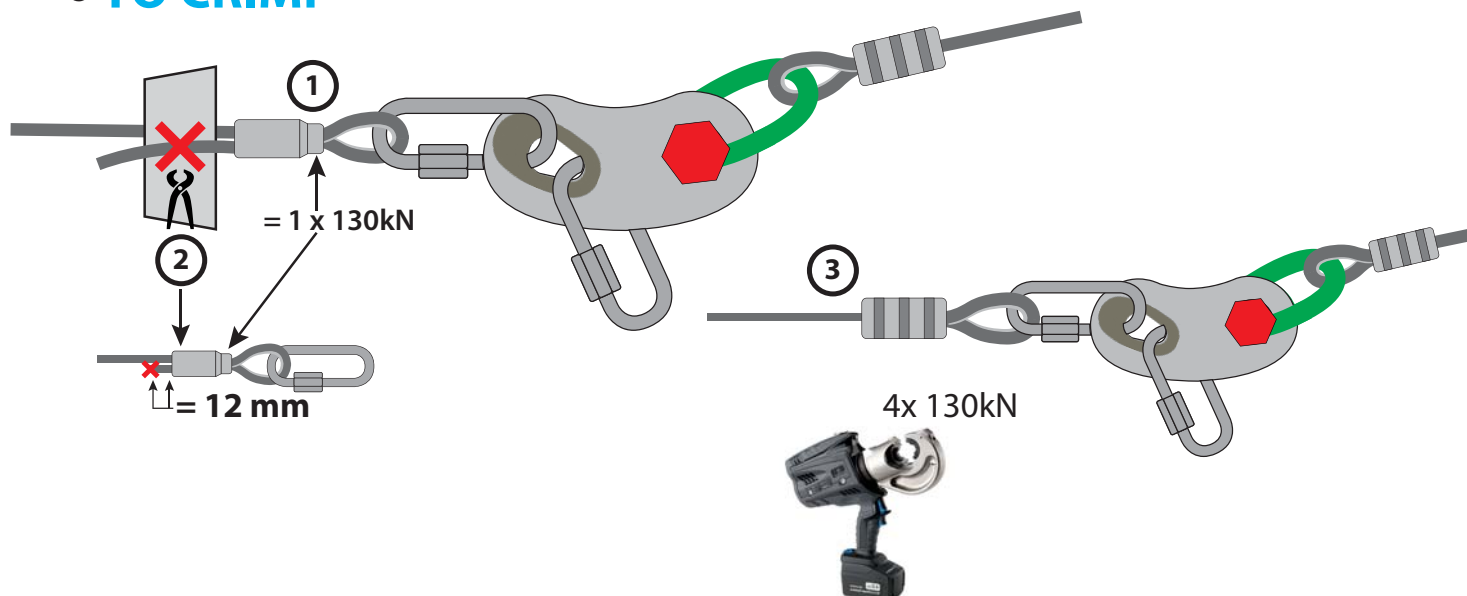

Operation 7


● OPTION:

TENSION SYSTEM = FOR ZIPLINE

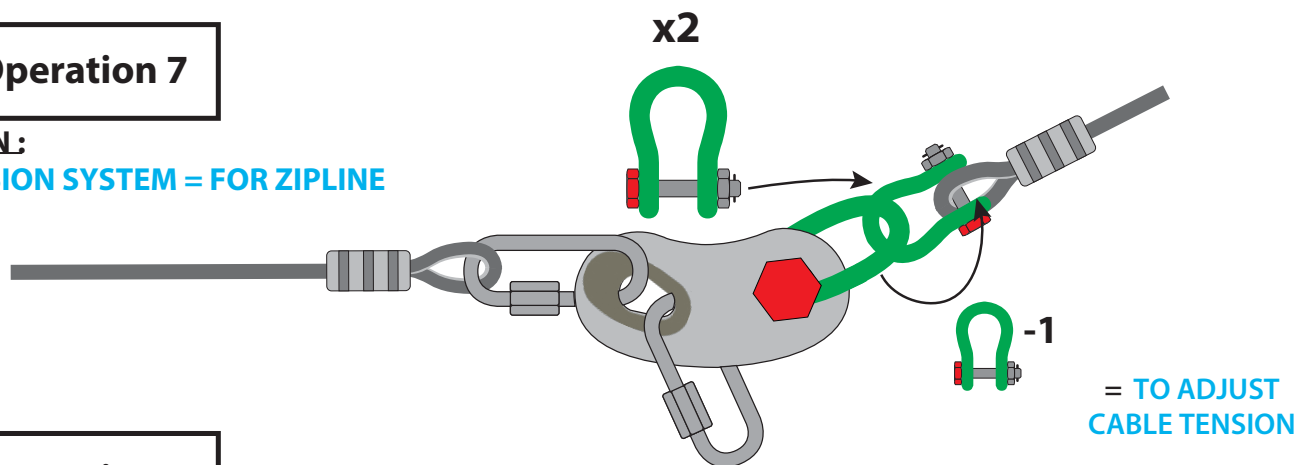

Operation 8

● RECOMMANDATION ASSEMBLY

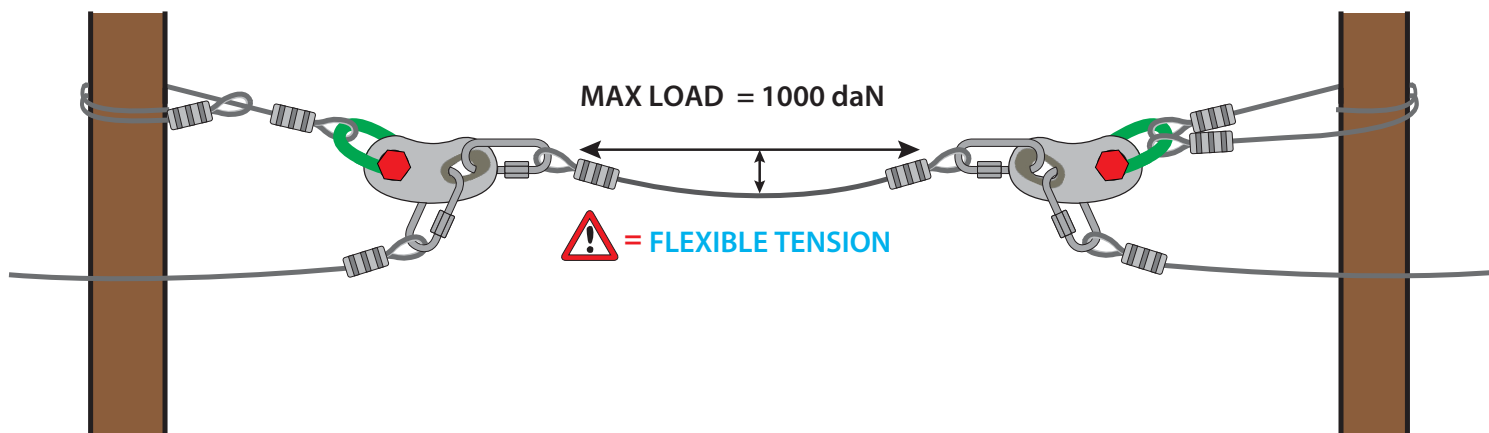

Operation 9

● JUNCTION

NOT contractual Examples
system for fixation

