



ZAZA2 PBT

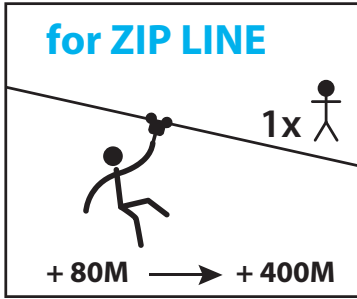

ADVANTAGES


- Easy to install
- No CLAMP
- Quick adjustment
- No maintenance



Safety Line :
ø 12 mm or 1/2 "





Galvanized steel wire rope with metal core :

- 7x19 / 1x19
- Non rotating wire rope
- 6x26 Swaged




EN 15567-1
EN13411-3


STANDARDS
ACCT

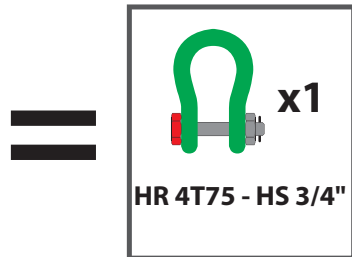


FIXATION EXAMPLE (non-exhaustive list)

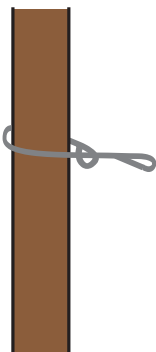

ROUND TEXTILE SLING FOR LIFTING TYPE "E" WLL mini 3 tons



STANDARDS: EN 13411-1/7



CABLES ø12 mm or 1/2"
OK! METALLIC CORE


THIMBLE




Chain HR/HS Ø 10/13 mm Grade 80 mini




WLL of the fixing element must be correctly sized

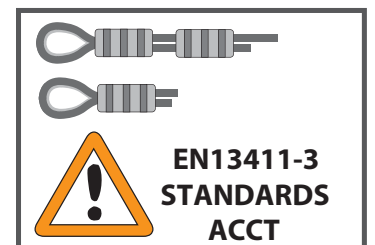

Operation 1

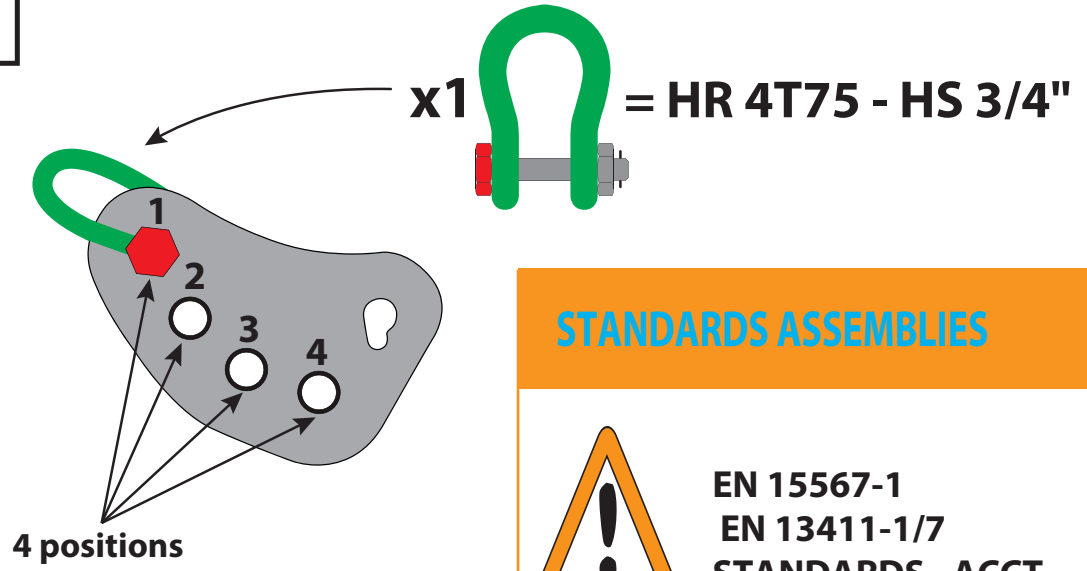


Operation 2

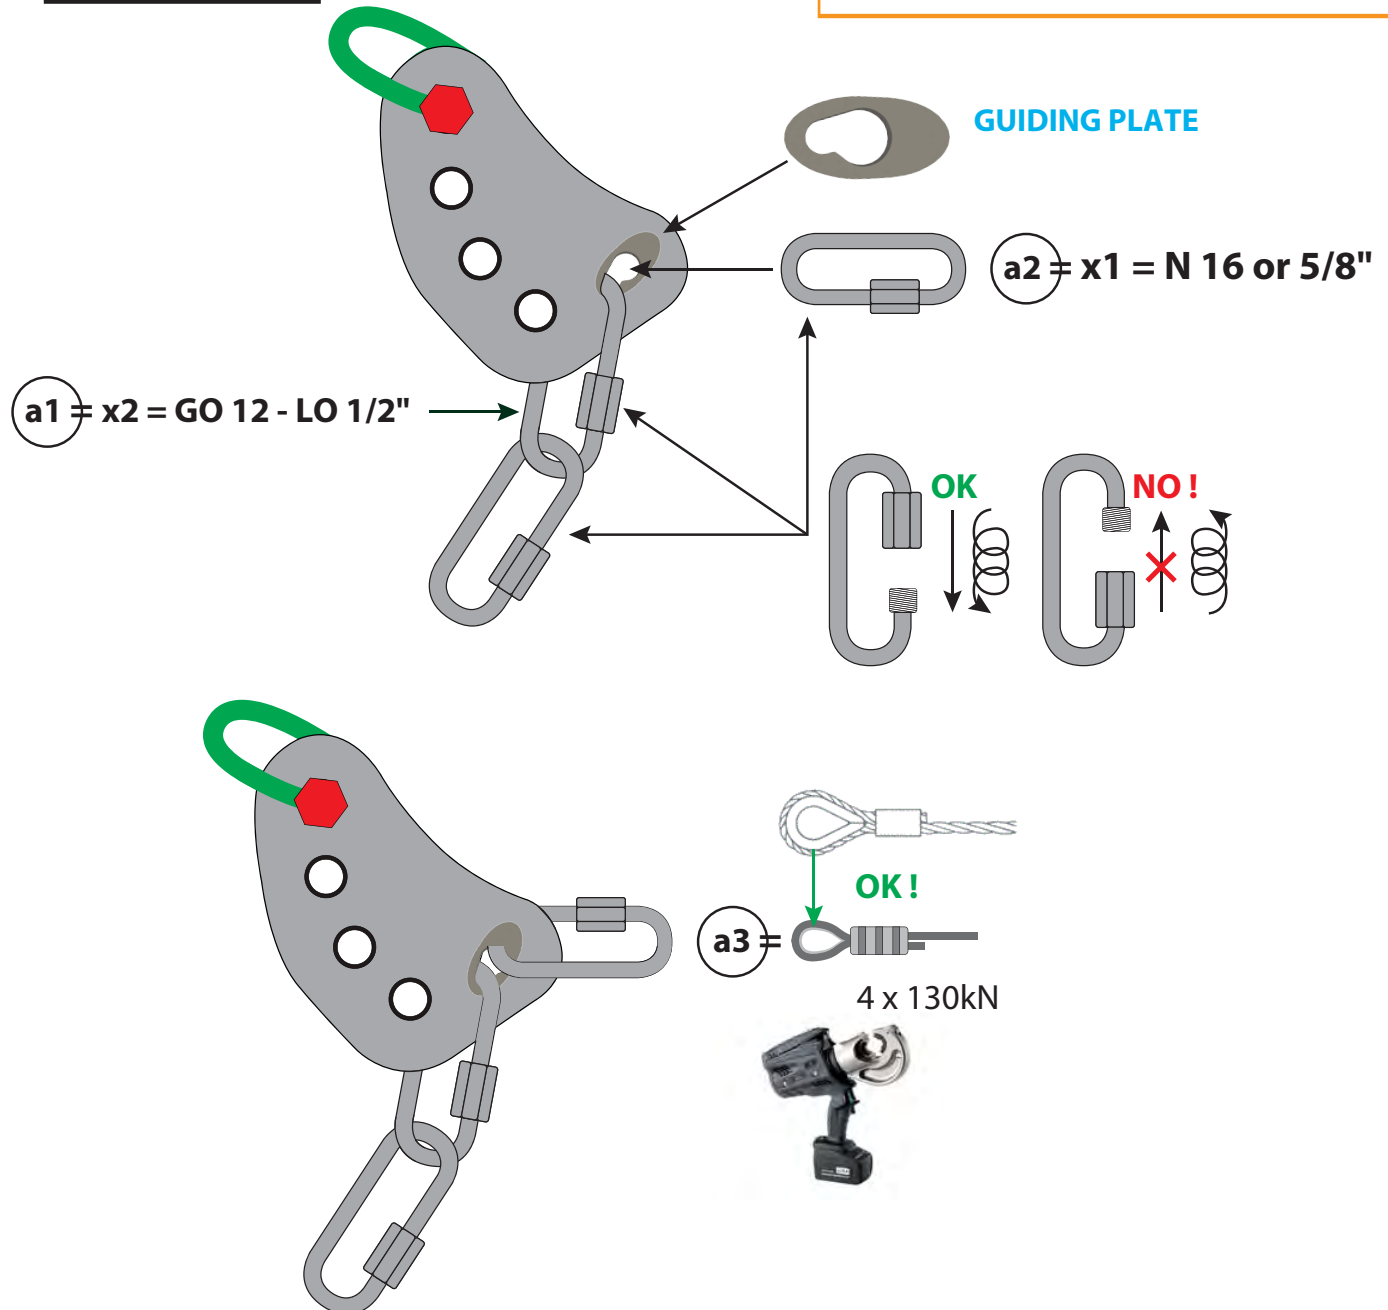


Operation 3

START ZIP LINE: CABLE INSTALLATION= NO PLATE

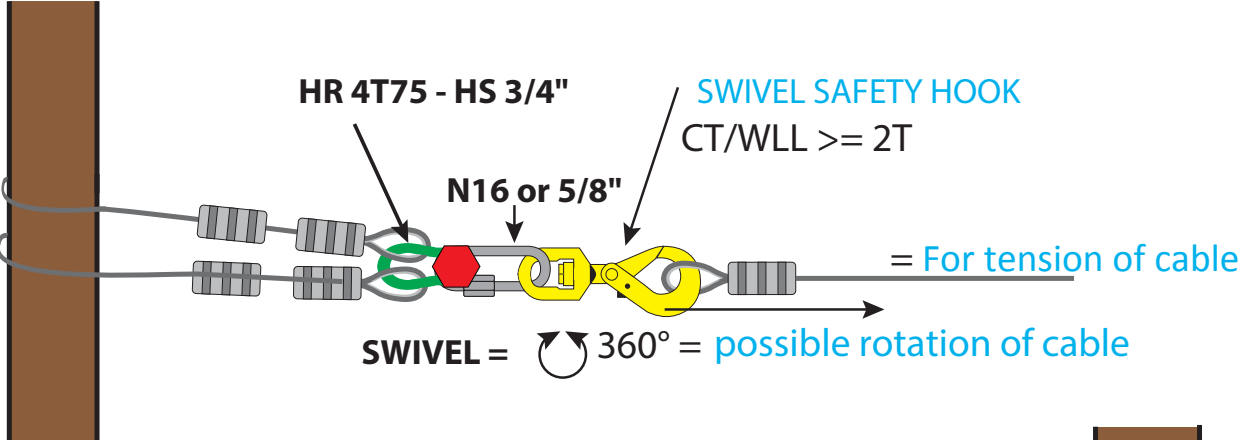


Operation 4

ARRIVAL ZIPLINE : PLATE INSTALLATION

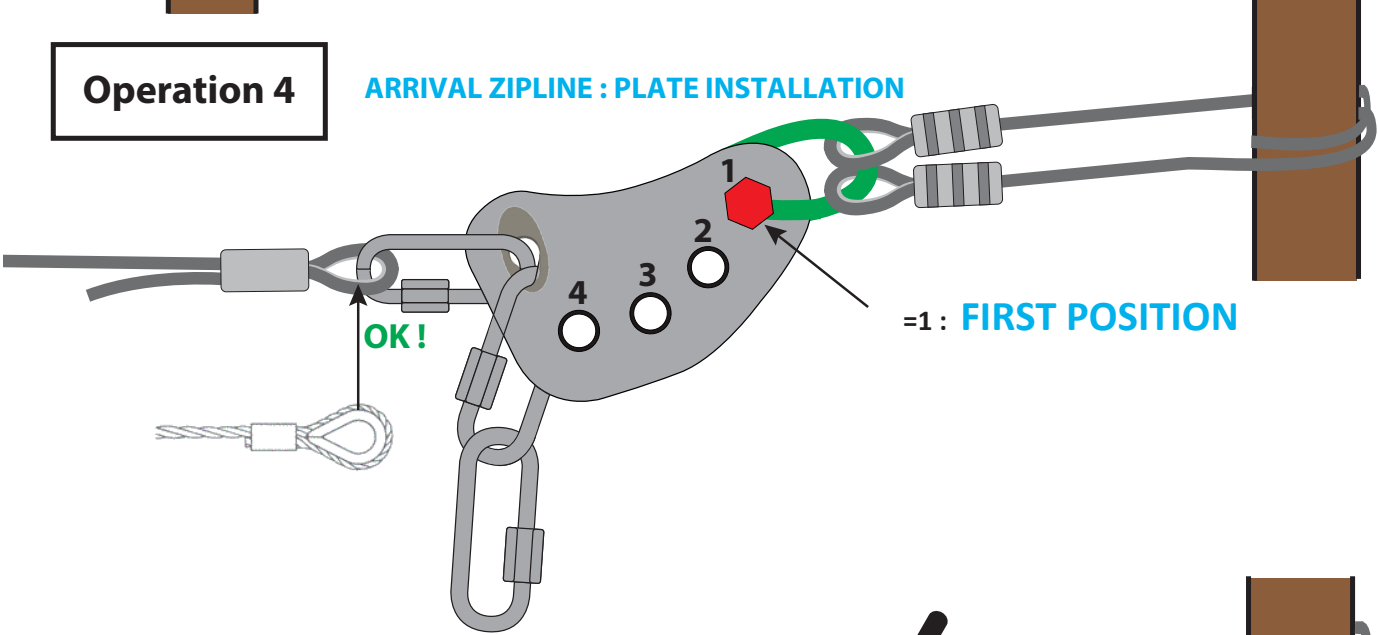



Operation 5

CABLE TENSION

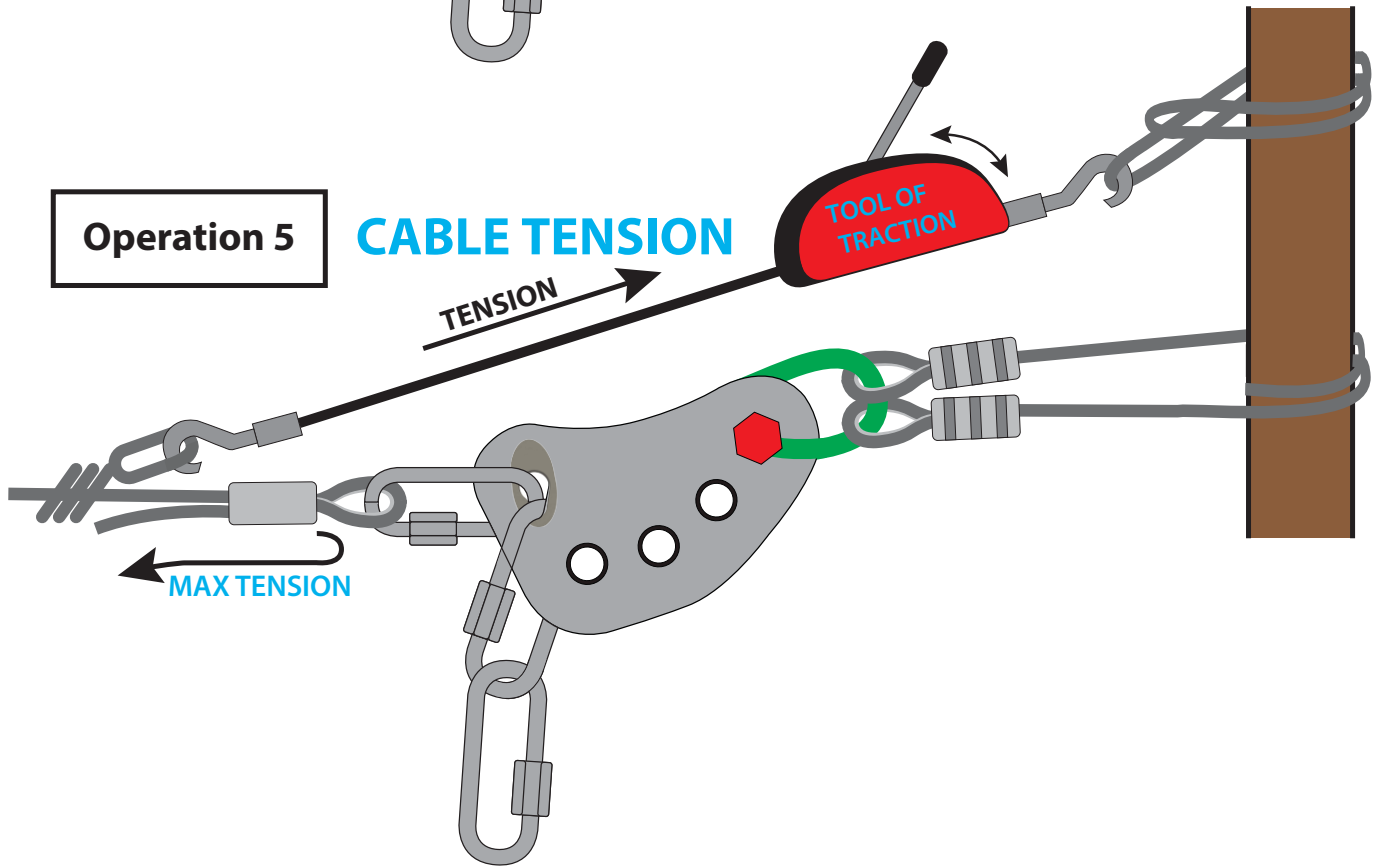


Operation 6

• **TO CRIMP**

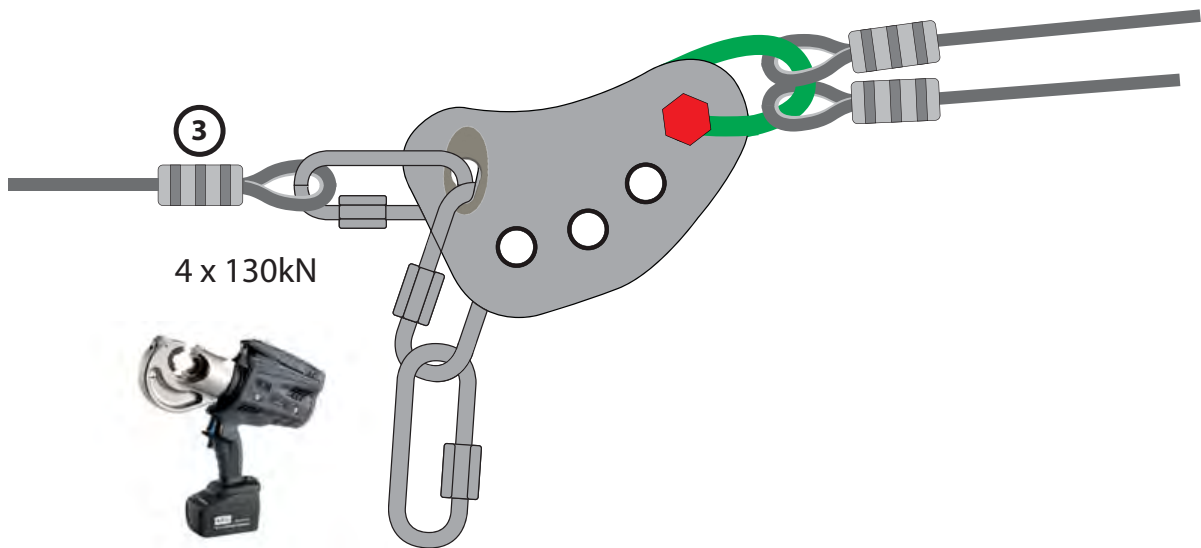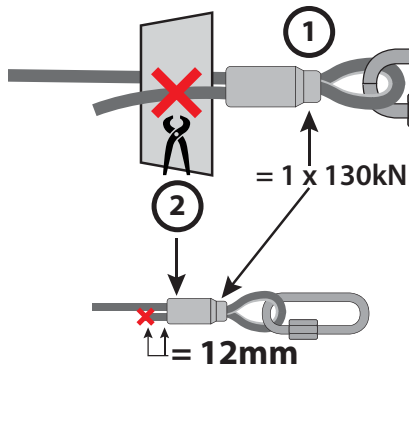

Operation 7


START ZIP LINE : PLATE INSTALLATION

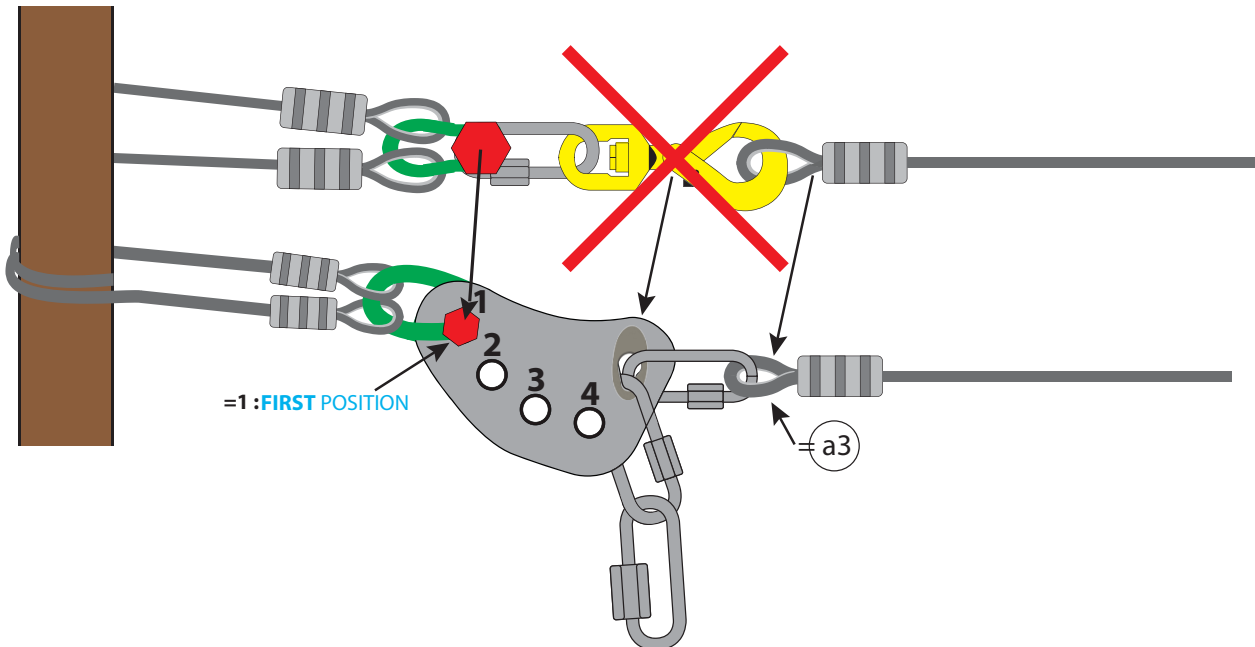


Operation 8

ADJUST the CABLE TENSION

1 ZIPLINE STARTING PLATE
FIRST ADJUSTMENT

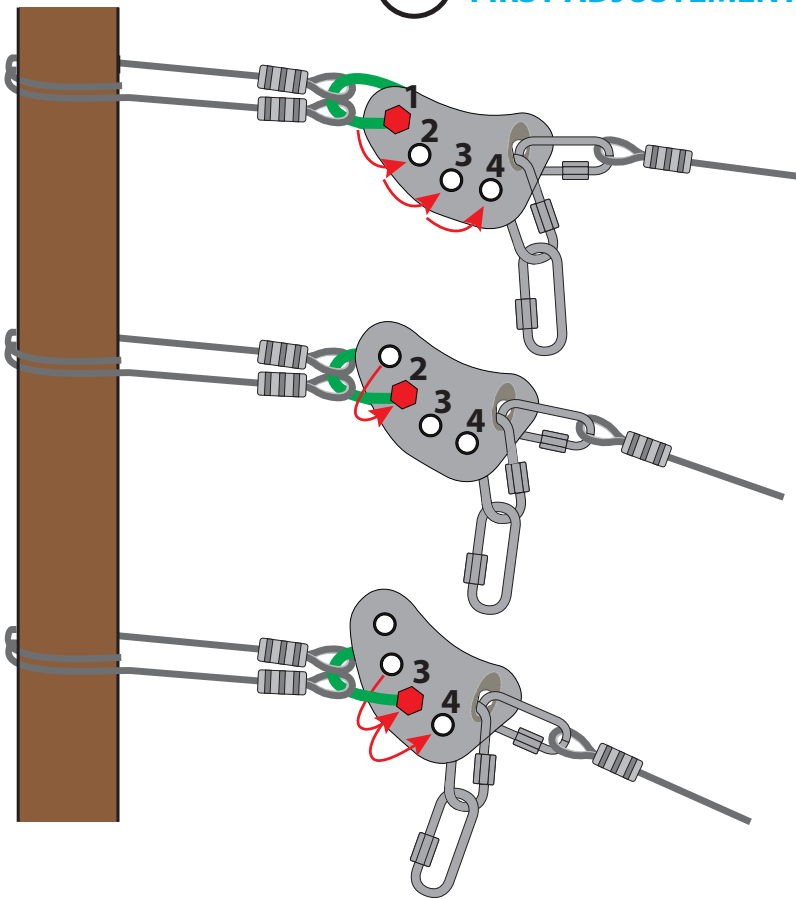


2 ZIPLINE ARRIVAL PLATE
LAST ADJUSTMENT

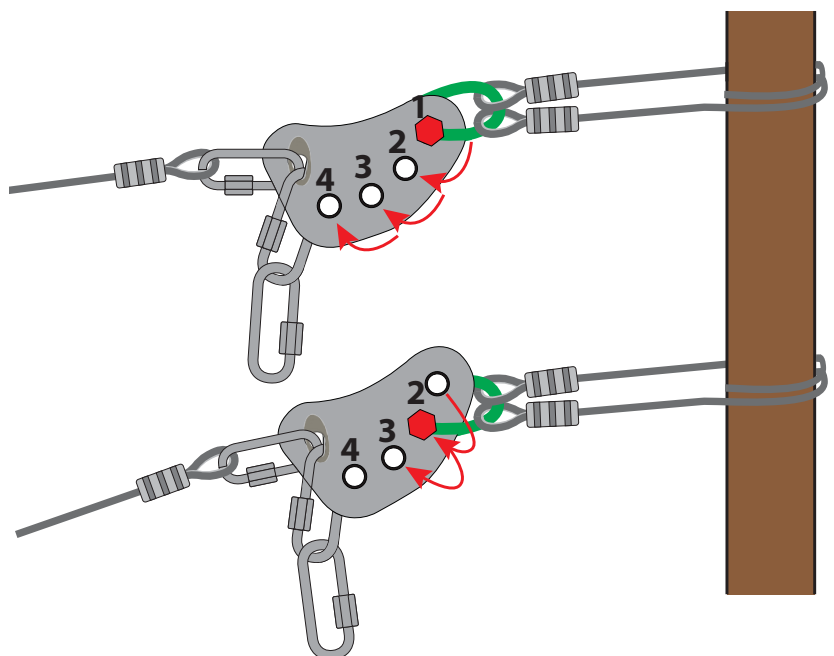

Operation 9

RECOMENDATION OF ASSEMBLY

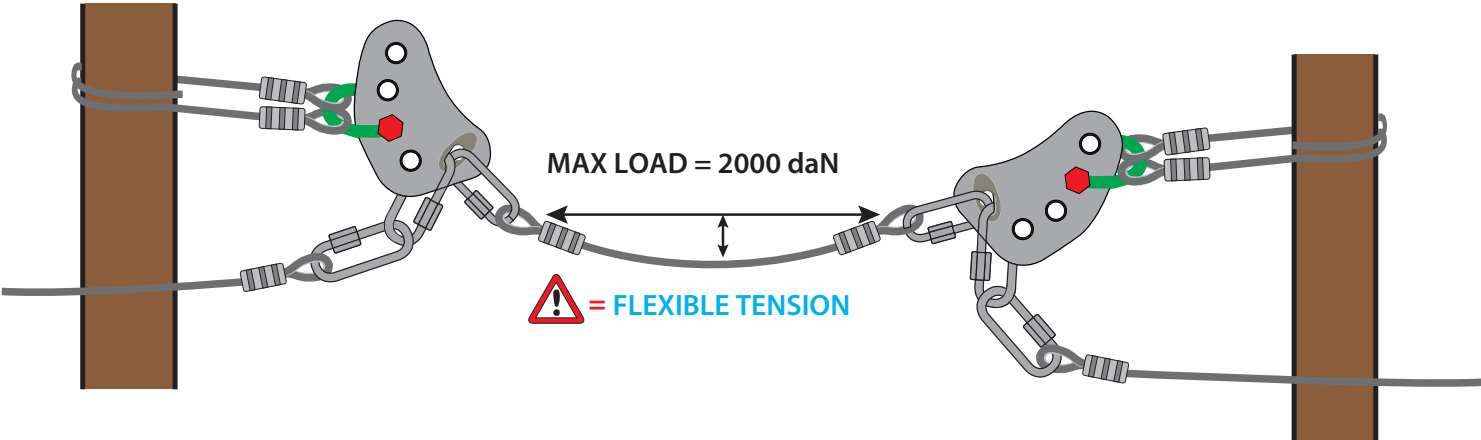

Operation 10

JUNCTION

Alternative example and suggestion for fixation

