



ZAZA2 PLS3

FOR GAMES

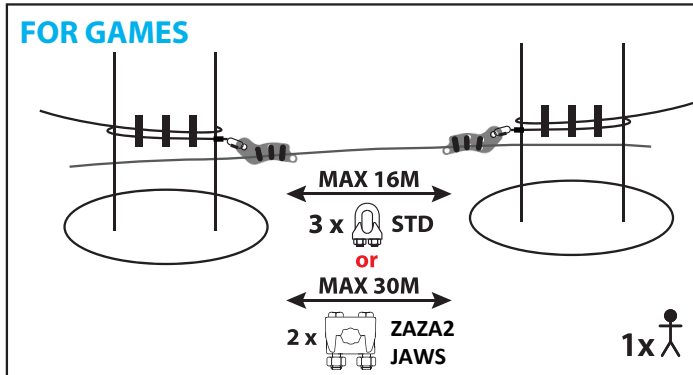

ADVANTAGE

Easy to install ALL TYPE COURSE




Safety Line :

Ø 12 mm or 1/2 "

Galvanized steel wire rope
with metal core :


-7x19 / 1x19
-Non rotating wire rope
-6x26 Swaged

ADAPTABLE





STANDARDS


EN 15567-1
EN 13411-1/7



=





FIXATION EXAMPLE (non-exhaustive list)



ROUND TEXTILE SLING FOR LIFTING TYPE "E" WLL mini 2 tons

STANDARDS: EN 13411-1/7

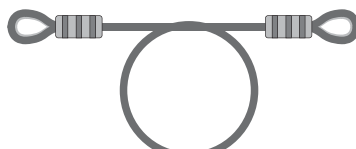

CABLES Ø12mm or 1/2"

OK! METALLIC CORE



THIMBLE




Chain HR/HS Ø 8/10 Grade 80 mini



WLL of the fixing element must be correctly sized

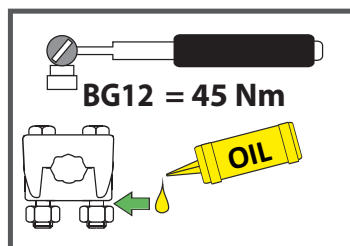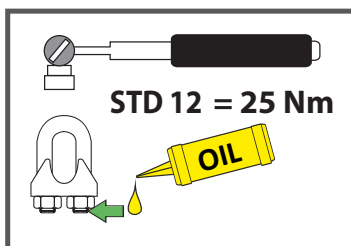

CRIMPER

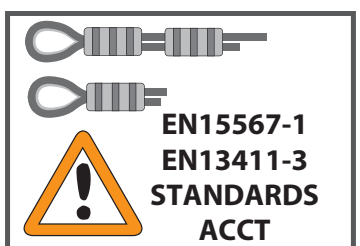

Operation 1

OK



X1 GO10-LO7/16"

STANDARDS OF ASSEMBLY



EN 15567-1
EN 13411-1/7
STANDARDS - ACCT

Operation 2

x3



STD 12 = EN 13411-5




MANDATORY GUIDING PLATE !

Operation 2 BIS



OIL




STD 12 = 25 Nm

2X ZAZA2 JAWS =

= 45 Nm

Same assembly direction


= OK!



MANDATORY GUIDING PLATE !

Operation 3

STARTING PLATE

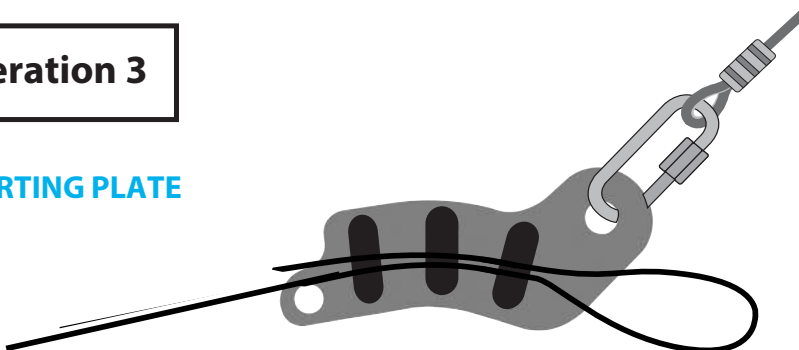


STANDARDS OF ASSEMBLY







EN 15567-1:2015
EN 13411-1/7
STANDARDS - ACCT

OBSERVE FITTING ORIENTATION OF BG CLAMPS




ZAZA2 JAWS

= OBSERVE THE DIRECTION OF CIRCULATION OF THE SAFETY HOOK

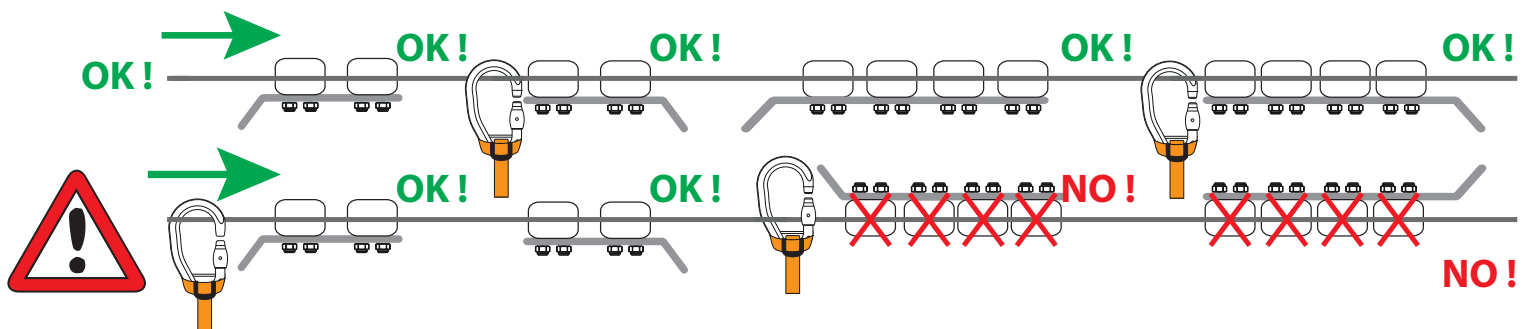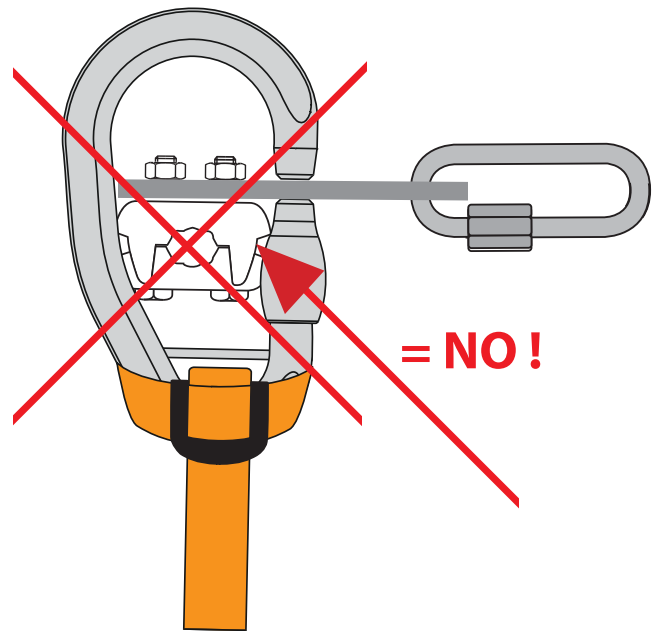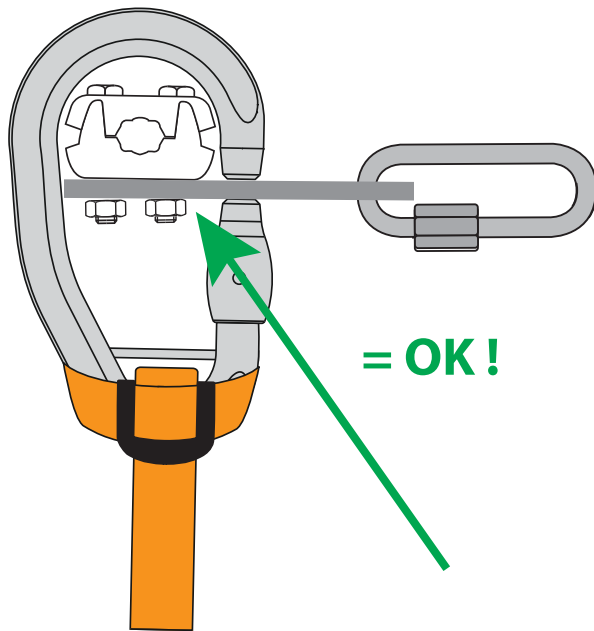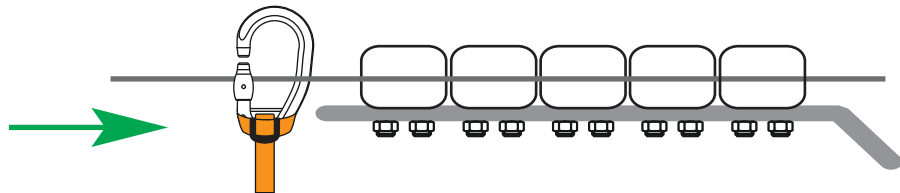


Operation 4

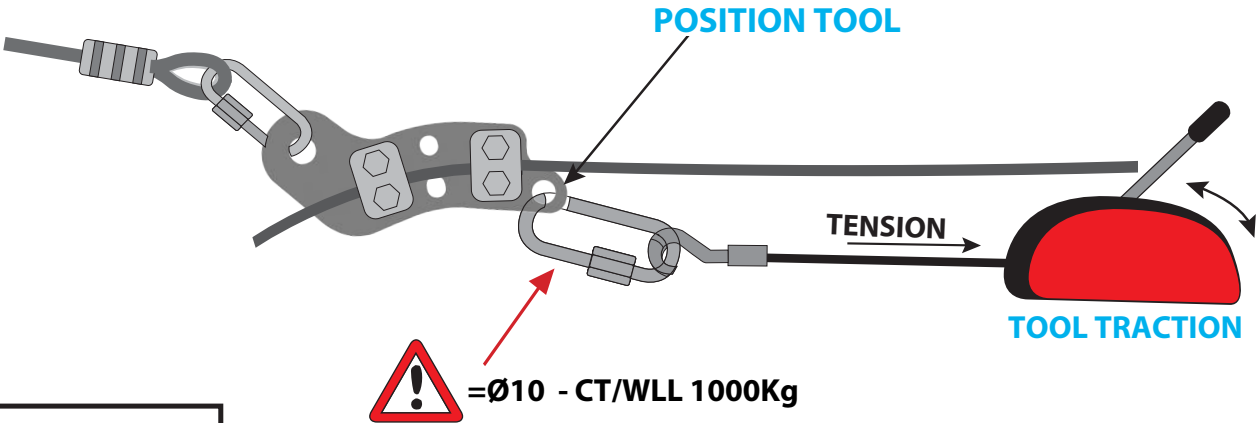

Operation 5

● **RECOMMENDATION ASSEMBLY**

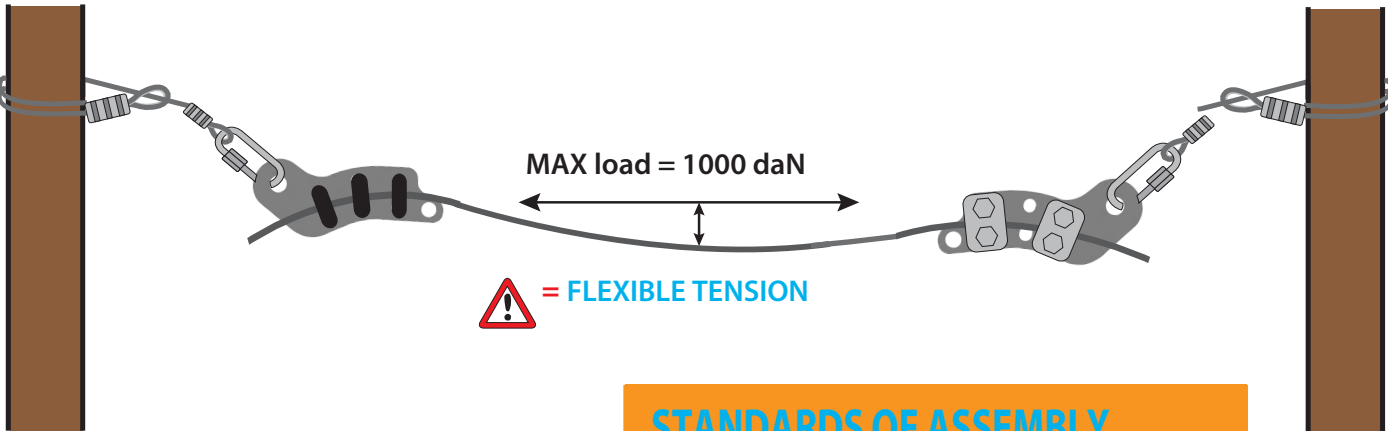



Operation 6

STANDARDS OF ASSEMBLY

EN 15567-1
EN 13411-1/7
STANDARDS - ACCT

● **JUNCTION JUNCTION**

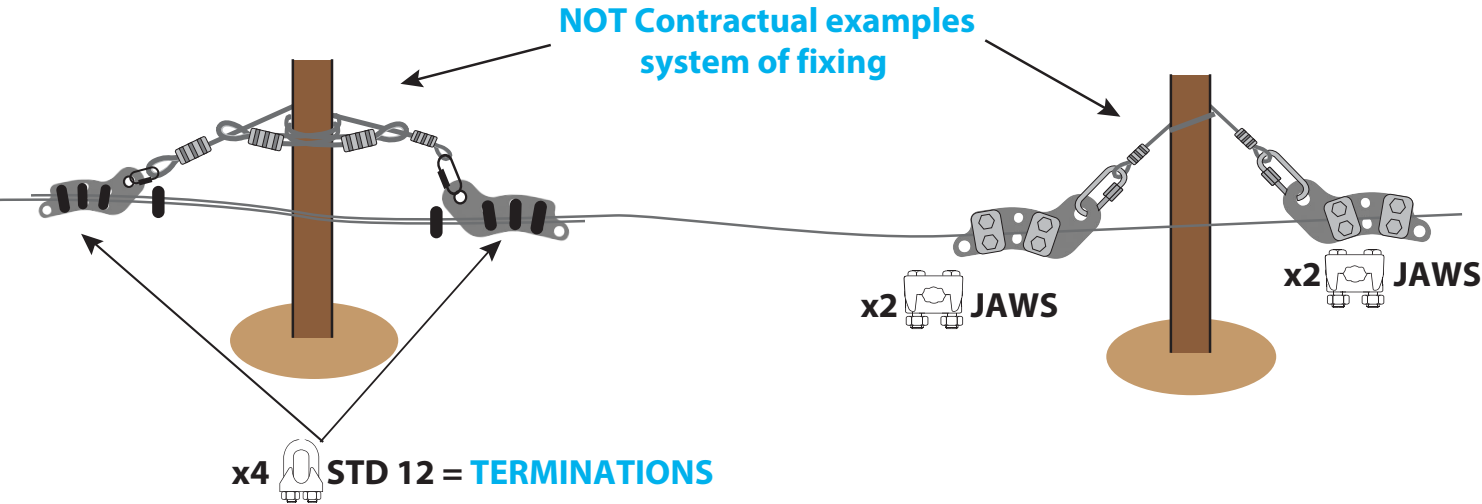

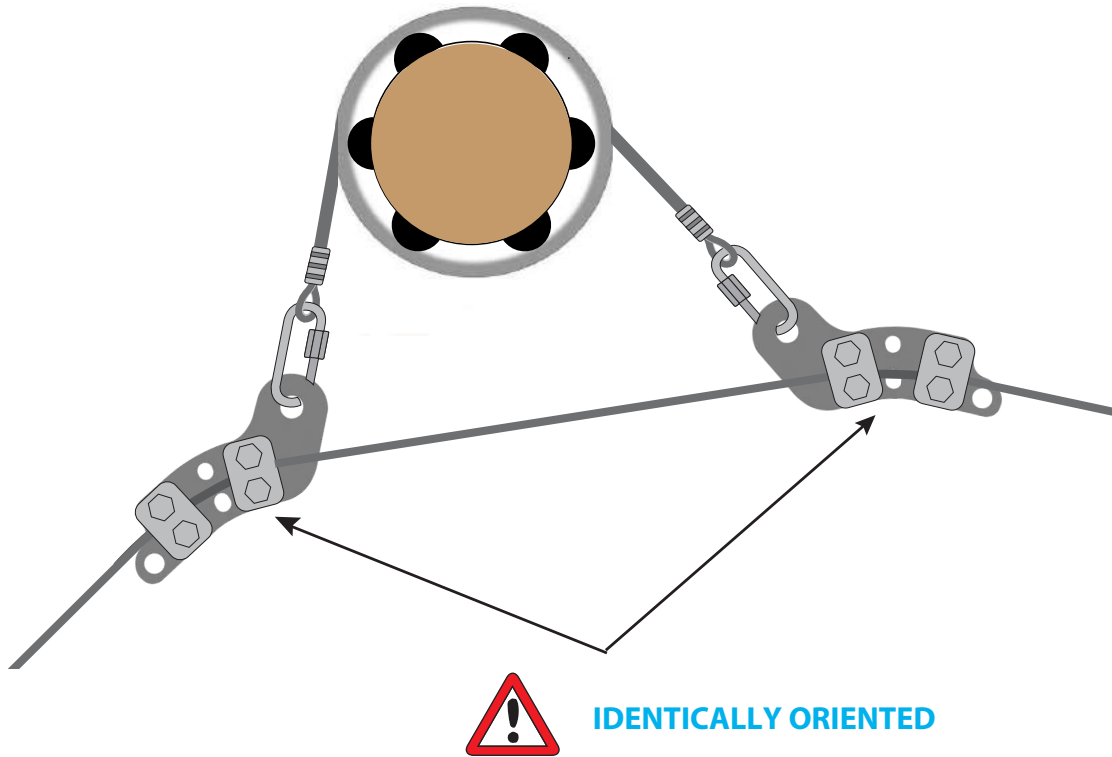

Operation 7

Assembly for rolling games

